


This genset line covers 30 kVA – 1250 kVA PRIME POWER range 50Hz (1500 RPM) and 33 kVA – 1375 kVA STANDBY POWER range 50Hz (1500 RPM). 60 Hz (1800 RPM) versions available for all models as well.

100 Years of experience in design, manufacturing, support and quality goes into every BAUDOUIIN PowerKit, which is the heart of this genset line. You can expect reliability, durability, excellent total cost of ownership and European quality from the RIGAS DIZELIS DG gensets based on Baudouin PowerKit products.

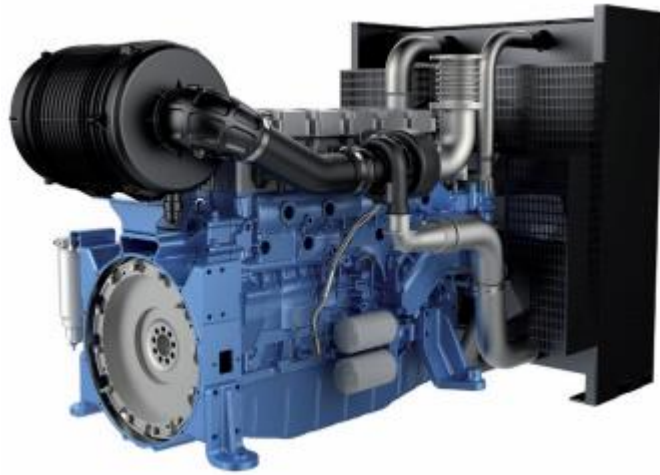

### Description & Key Scope

- Common bed frame, manufactured of electro welded steel profiles
- Control panel (on genset frame)
- Vibration isolators between generating set and base frame
- Integrated fuel tank
- Radiator cooling system
- Fully guarded fan
- Electric starter, engine-driven charging alternator
- Flexible compensator and silencer
- Drawing & Manual package
- Factory Test Report
- Factory Quality Certificates

Genset model	Prime power*, kVA	Standby Power*, kVA	Fuel consumption (100% load), l/h	Standard fuel tank, liter	Length**, cm	Width**, cm	Height**, cm	Weight**, kg
<b>50 Hz, 400 V, 1500 rpm</b>								
E350BM	350	385	73.5	400	290	120	165	2650
E400BM	400	440	82.8	400	300	120	165	2770

\*\* final dimensions and weight dependent on selected options

### Description & Key Scope

\* Prime Power rated in accordance with ISO 8528-1.

#### Prime Power

Unlimited hours of use. Average variable load factor is 70% of the Prime Power rating. 10% overload limited to 1 in 12 hours and/or not to exceed 500 hours per year. The 10% overload is available.

#### Standby Power

Maximum output available. Typical usage of 200 hours per year with a maximum of 500 hours per year with varying loads. Average variable load factor is 70% of Standby Power rating. No overload is available.

## Engine General Data\*

Maker	BAUDOUIIN
Model	6M21G385/440/5e2
No of cylinders	6 in-line
Working principle	4-stroke
Displacement, L	12.54
Bore x stroke, mm	127 x 165
Compression ratio	16:1
Aspiration	Turbocharged
Rotation (seen from flywheel end)	Counter clockwise
Flywheel	SAE 1
Injection system type	Mechanical Pump
Governor type	Electronic
Oil capacity	27 (min) – 30 (max) liter
Starter type	1-pole, 24V, DC

\* Other engine parameters are available on request.

## Alternator General Data\*\*

Maker	Mecc Alte (Italy) (other brands on request)
Poles	4
Cos $\varphi$	0.8
Coupling	Direct
Insulation class	H
Execution	Brushless
Standard protection	IP21

\*\* Other alternator parameters are available on request.

## Available Key Options (other options are available on request)

### Engine

- Engine water jacket heater
- Manual lub oil drain pump
- Starting batteries
- Static battery charger
- Starting battery switch

### Alternator

- Winding and bearing temperature measuring
- Anti-condensation heater
- IP23 protection
- Quadrature Droop kit

### Control

- Remote control panel
- ATS Automatic transfer switch
- Synchronizing with mains or other genset(s)

### Other

- Installation in soundproof and weathertight canopy or container
- Additional main fuel tank with automatic fuel filling system
- On-road trailer
- Special tools and spare parts
- Commissioning and start-up
- Extended warranty



**ANNO 1949**

Address: 36 Ganibu dambis, Riga, Latvia, LV-1005  
Telephone: +371 67391781, +371 67381626  
Fax: +371 67381925  
E-mail: sales@rigasdizelis.lv  
Website: www.rigasdizelis.lv